
Holcomb Boulevard Water Distribution System - PWSID: NC0467043 Voluntary Monitoring Detected Contaminants

Contaminants	Average Amount Detected	Unit of Measure	Range		
			Low	High	
Finished Drinking Water Detections					
Explosive Constituents					
1,3-Dinitrobenzene	1.00	ug/L	0.82	1.5	
Perchlorate	0.21	ug/L	0.023	0.47	
Inorganic Contaminants	1				
Barium	1.9	ug/L	1.4	2.3	
Calcium	13,000	ug/L	10,000	16,000	
Chlorate	450	ug/L	200	700	
Chloride	14.5	mg/L	14 15 Only detection		
Chromium		ug/L		0.24	
Hexavalent Chromium [Cr+6]	0.20 38	ug/L	0.16 22	0.24 54	
Iron	0.14	ug/L	0.14	0.14	
Lead		ug/L			
Magnesium	2,050	ug/L	1,900 Only de	2,200	
Nickel Potassium	0.87	ug/L		1,500	
Potassium Sodium	1,500 6,600	ug/L	1,500 1,200	1,500	
Strontium	81.5	ug/L ug/L	1,200 77	86	
Vanadium	0.83	ug/L ug/L	0.70	0.95	
Volatile Organic Contaminants	0.63	ug/L	0.70	0.95	
Bromodichloromethane	10.1	ug/L	8.1	12	
Chloroform	36.5	ug/L	24	49	
Chloromethane	0.38	ug/L	Only de		
Dibromochloromethane	2.45	ug/L	2.3	2.6	
Distribution		r Water Detections		2.0	
Evaluative Constituents	Naw Groundwate	Water Detections			
Explosive Constituents PETN	0.32	/1	Only do	staction	
: = : : :	0.32	ug/L	Only de	etection	
Inorganic Contaminants Arsenic	0.46	/1	0.41	0.52	
Barium	6.04	ug/L	0.41	0.53 24	
Calcium	76,713	ug/L ug/L	5,300	180,000	
Chloride	9.7	ug/∟ mg/L	6.8	23	
Chromium	1	ug/L	Only de		
Cobalt	0.19	ug/L	0.14	0.41	
Copper	0.004	mg/L	0.002	0.011	
Hexavalent Chromium [Cr+6]	0.37	ug/L	Only de	*****	
Iron	1349	ug/L	61	5500	
Lead	0.19	ug/L	0.06	0.92	
Magnesium	1,694	ug/L	1,300	3,000	
Manganese	34	ug/L	3.1	77	
Nickel	1.63	ug/L	0.5	3.9	
Potassium	1,606	ug/L	1,100	2,400	
Selenium	0.90	ug/L	0.71	1.1	
Sodium	8,106	ug/L	4,800	21,000	
Strontium	212	ug/L	130	560	
Thallium	0.11	ug/L	Only de		
Vanadium	0.78	ug/L	Only de		
Zinc	15.9	ug/L	6.4	40	
Volatile Organic Contaminants					
Chloroform	0.58	ug/L	Only de	etection	
Chloromethane	0.37	ug/L	0.32	0.36	
Synthetic Organic Contaminants		<u>. </u>			
Di(2-ethylhexyl)phthalate	5.5	ug/L	Only de	Only detection	
Microbiological Contaminants					
Total Organic Carbon	1.3	mg/L	0.8	2.8	
<u> </u>				-	

Holcomb Boulevard Water Treatment Process

As the water enters the water treatment plant, sodium hypochlorite is added to protect against microbial contamination, and the water is placed into a storage reservoir. From the storage reservoir the water is moved to a set of large, cone-shaped devices

called spiractors. The spiractors are used to soften the water by removing minerals. Lime is added at the bottom of the spiractors to aid the softening The water is then process. passed through a set of filters, which contain layers of sand and carbon, to remove particles through a process called filtration. Fluoride (to prevent tooth decay) is added to the water, and then the clean water is placed in a large storage tank called a reservoir. When water is needed by customers, it is pumped from the reservoirs and distributed throughout the Holcomb Boulevard community water system.

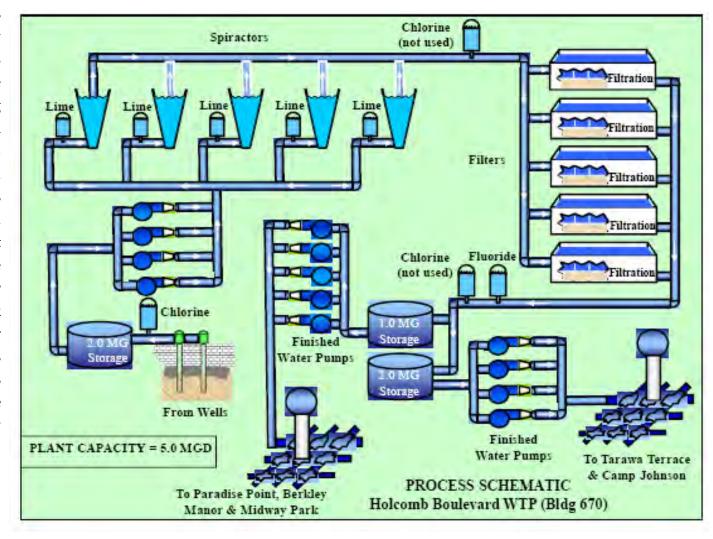



SOURCE WATER ASSESSMENT PROGRAM (SWAP) RESULTS

The North Carolina Department of Environmental Quality (NCDEQ), Public Water Supply Section (PWSS), Source Water Assessment Program (SWAP) conducted assessments for all drinking water sources across North Carolina. The purpose of the assessments was to determine the susceptibility of each drinking water source (well or surface water intake) to Potential Contaminant Sources (PCSs). The results of the assessment are available in SWAP reports that include maps, background information, and a relative susceptibility rating of Higher, Moderate or Lower. The relative susceptibility rating of each source for the Holcomb Boulevard Water Treatment System was determined by combining the contaminant rating (number and location of PCSs within the assessment area) and inherent vulnerability rating (i.e., characteristics or existing conditions of the well or watershed and its delineated assessment area). The assessment findings based on the SWAP report completed on July 11, 2015 are summarized in the table below:

Holcomb Boulevard Drinking Water Supply Wells			
Source Name	Susceptibility Rating		
557	Lower		
558	Lower		
584	Lower		
617	Lower		
618	Lower		
619	Lower		
646	Moderate		
647	Moderate		
648	Moderate		
650	Higher		
698	Higher		
699	Higher		
701	Moderate		
703	Higher		
704	Higher		
705	Higher		
708	Lower		
LCH4009	Higher		

It is important to understand that a susceptibility rating of "higher" does not imply poor water quality, only the system's potential to become contaminated by PCSs in the assessment area. The complete SWAP report for the Holcomb Boulevard Water Treatment System may be viewed on the web at http://www.ncwater.org/?page=600. In order to access this report you will need to enter either the system name or PWS ID. Both have been provided below. Please note that because SWAP results and reports are periodically updated by the PWS Section, the results available on this website may differ from the results that were available at the time this report was prepared.

System Name: USMC--Holcomb Blvd

PWS ID: 0467043



WATER CONSERVATION

Did you know that the average U.S. household uses approximately 400 gallons of water per day or 100 gallons per person per day? You can play a role in conserving water by becoming conscious of the amount of water your household is using and by looking for ways to use less whenever possible. It is not hard to conserve water. Small changes can make a big difference. Here are a few tips:

- ➤ Take short showers a 5 minute shower uses 4 to 5 gallons of water compared to up to 50 gallons for a bath.
- ➤ Run your clothes washer and dishwasher only when they are full. You can save up to 1,000 gallons a month.
- ➤ Shut off water while brushing your teeth, washing your hair and shaving and save up to 500 gallons a month.
- ➤ Check every faucet in your home for leaks. Just a slow drip can waste 15-20 gallons a day.
- ➤ Check your toilets for leaks by putting a few drops of food coloring in the tank. Watch for a few minutes to see if the color shows up in the bowl. It is not uncommon to lose up to 100 gallons a day from an invisible toilet leak.
- ➤ Use a water-efficient showerhead. They're inexpensive, easy to install, and can save you up to 750 gallons a month.
- ➤ Water plants only when necessary and adjust sprinklers so only your lawn is watered. Apply water only as fast as the soil can absorb it and during the cooler parts of the day to reduce evaporation.
- ➤ Don't run the hose while washing your car. Use a bucket of water and a quick hose rinse at the end or wash vehicles at a carwash that recycles its water. Saves 150 gallons each time.

Teach your kids about water conservation to ensure a future generation that uses water wisely. Visit www.epa.gov/watersense for more information.

Remember, when you conserve water you also conserve energy!